


# Wireless Channel


These slides only gives an overview of the ideas.

Full details can be found in:


<http://www.eecs.berkeley.edu/~dtse/book.html>

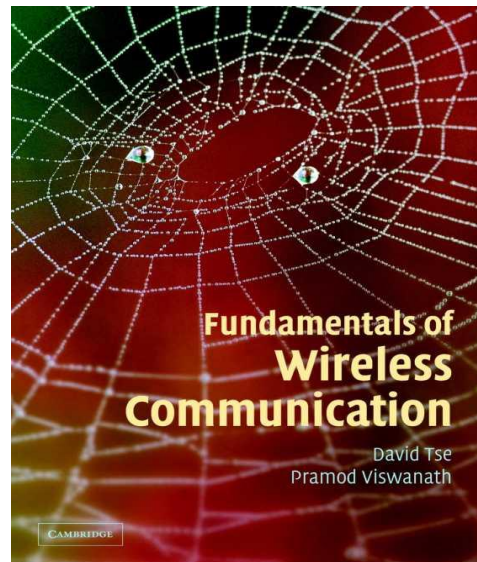

# Wireless Multipath Channel

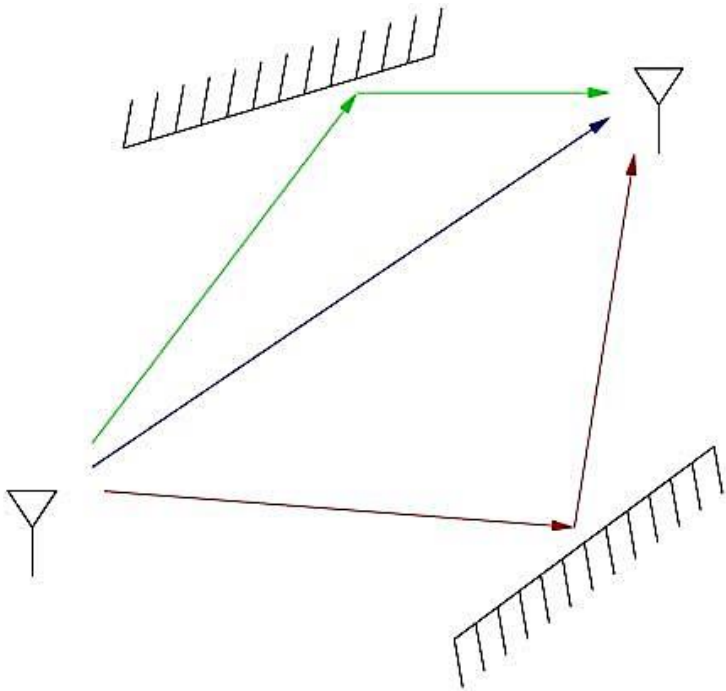

Channel Quality

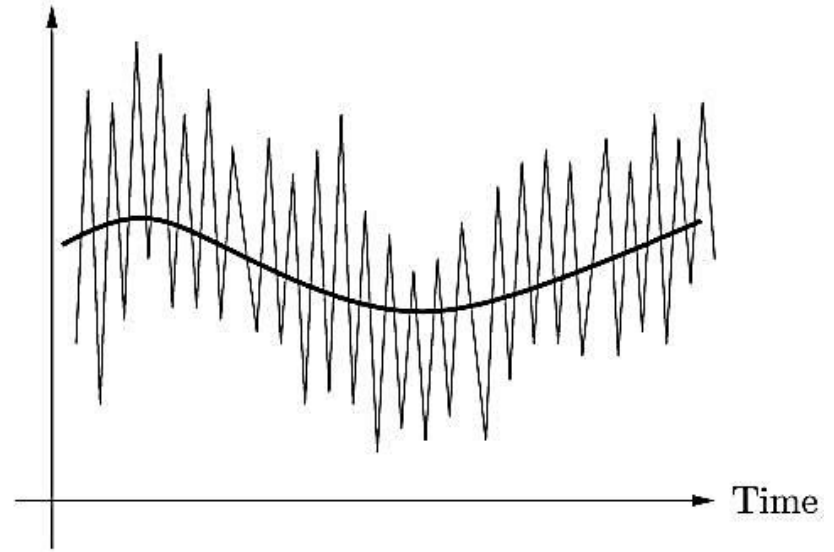

# Channel Fading

Fading is :

- a variation of a signal with time or frequency or position.
- a random process
- due to either multipath, or weather or shadowing

## Shadowing


- due to obstruction between Tx & Rx
- a result of reflection and scattering

Channel varies at two spatial scales:

- large scale fading
- small scale fading

# Large-scale fading

- Variation of signal strength over distance of the order of cell size
- In free space, received power attenuates like  $1/r^2$  while with reflection from ground like  $1/r^4$
- With obstructions and more reflections, can attenuate even more rapidly with distance. Detailed modelling complicated.

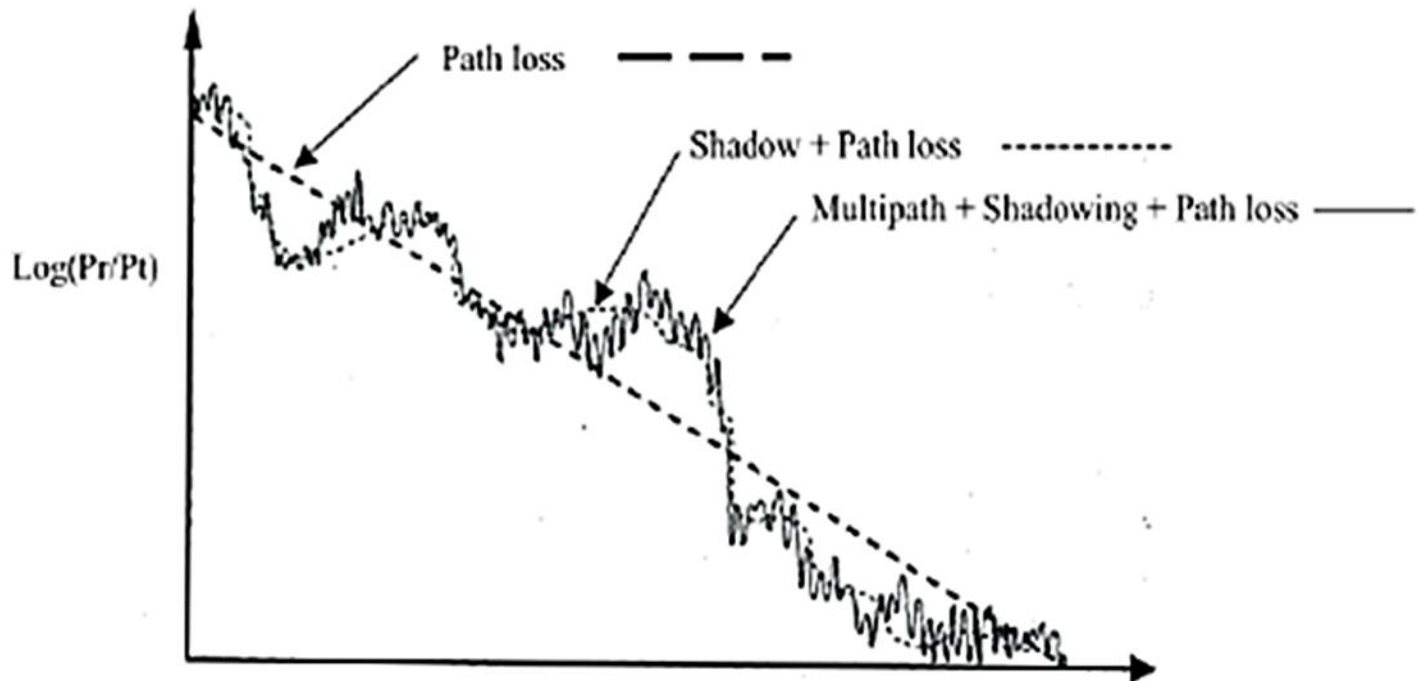

# Simple path loss model

$d_0$  .. reference distance in antenna's far-field

usually 1-10m .... Indoor (10-100m) outdoor

$$\overline{PL}(d) \propto \left(\frac{d}{d_0}\right)^n$$

$$\overline{PL}(dB) = \overline{PL}(d_0) + 10n \log\left(\frac{d}{d_0}\right)$$

Environment	Path Loss Exponent, $n$
Free space	2
Urban area cellular radio	2.7 to 3.5
Shadowed urban cellular radio	3 to 5
In building line-of-sight	1.6 to 1.8
Obstructed in building	4 to 6
Obstructed in factories	2 to 3

# Then,

- The surrounding environment causes different loss at same distance
- Time constants associated with variations are very long as the mobile moves, many seconds or minutes.
- More important for cell site planning, less for communication system design.

# Small-scale multipath fading

- Wireless communication typically happens at very high  $f_c$ . (eg.  $f_c = 900$  MHz or 1.9 GHz for cellular)
- Multipath fading due to **constructive** and **destructive** interference of the transmitted waves.
- Channel varies when mobile moves a distance of the order of the  $\lambda_c$ . This is about 0.3 m for 900 MHz cellular.
- For vehicular speeds, this translates to channel variation of the order of 100 Hz.
- Primary driver behind wireless communication system design.



# Game plan

- We wish to understand how physical parameters such as
  - carrier frequency
  - mobile speed
  - bandwidth
  - delay spread
  - angular spread

impact how a wireless channel behaves from the **communication system** point of view.

- Find deterministic **physical** model

# Physical Models

- Wireless channels can be modeled as linear time-varying systems:

$$y(t) = \sum_i a_i(t)x(t - \tau_i(t))$$

where  $a_i(t)$  and  $\tau_i(t)$  are the gain and delay of path  $i$ .

- The time-varying impulse response is:


$$h(t, \tau) = \sum_i a_i(t)\delta(\tau - \tau_i(t))$$

- Consider first the special case when the channel is time-invariant:

$$h(\tau) = \sum_i a_i\delta(\tau - \tau_i)$$

# Passband to Baseband Conversion

- Communication takes place at  $[f_c - W/2, f_c + W/2]$
- Processing takes place at baseband  $[-W/2, W/2]$

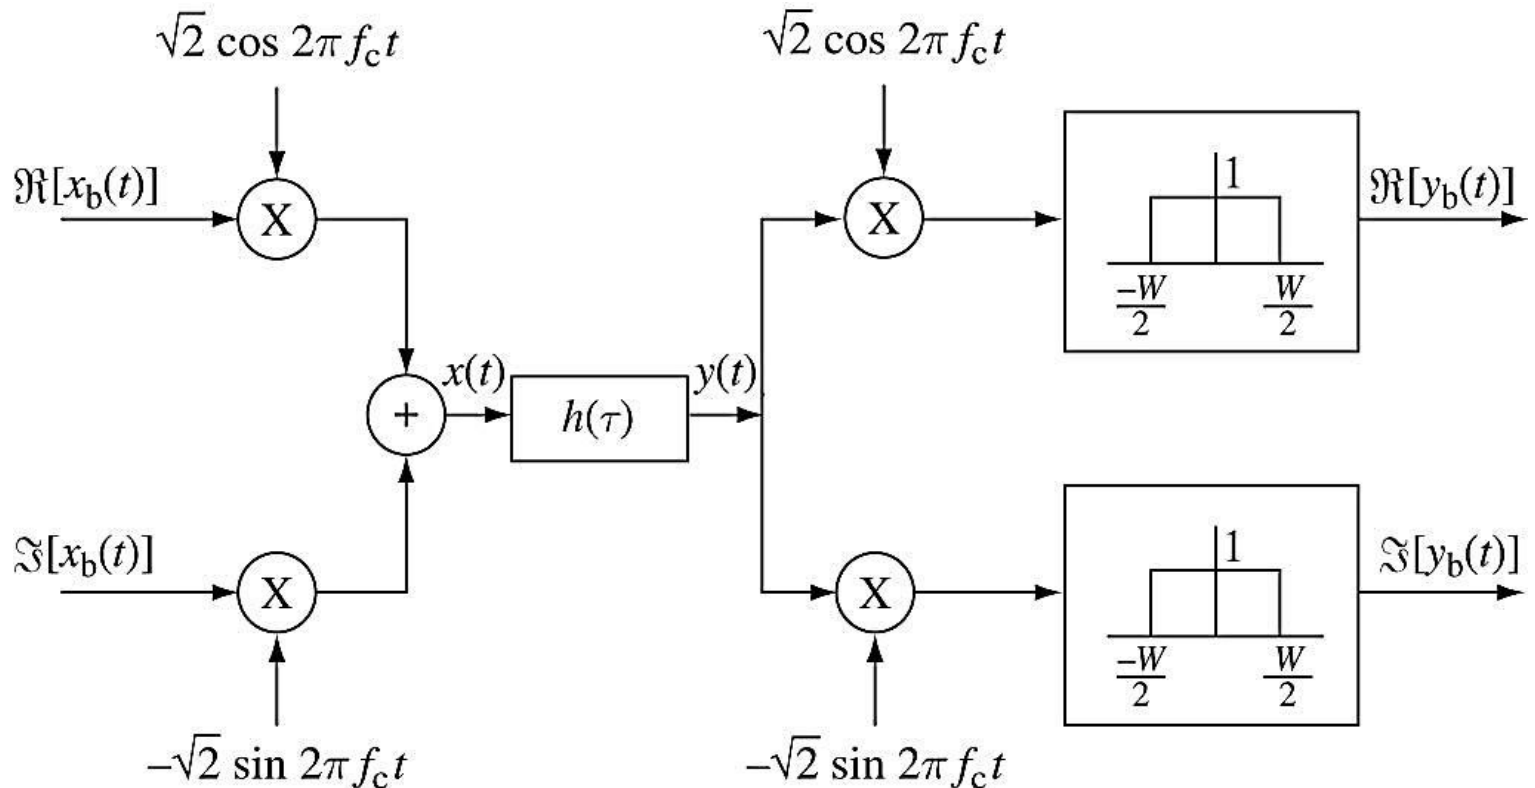

# Complex Baseband Equivalent Channel

- The frequency response of the system is shifted from the passband to the baseband.


$$H_b(f) = H(f + f_c)$$

$$h_b(\tau) = h(t)e^{-j2\pi f_c t} = \sum_i a_i^b \delta(\tau - \tau_i)$$

$$\text{where } a_i^b = a_i e^{-j2\pi f_c \tau_i}$$

- Each path is associated with a **delay** and a complex **gain**.

# Modulation and Sampling

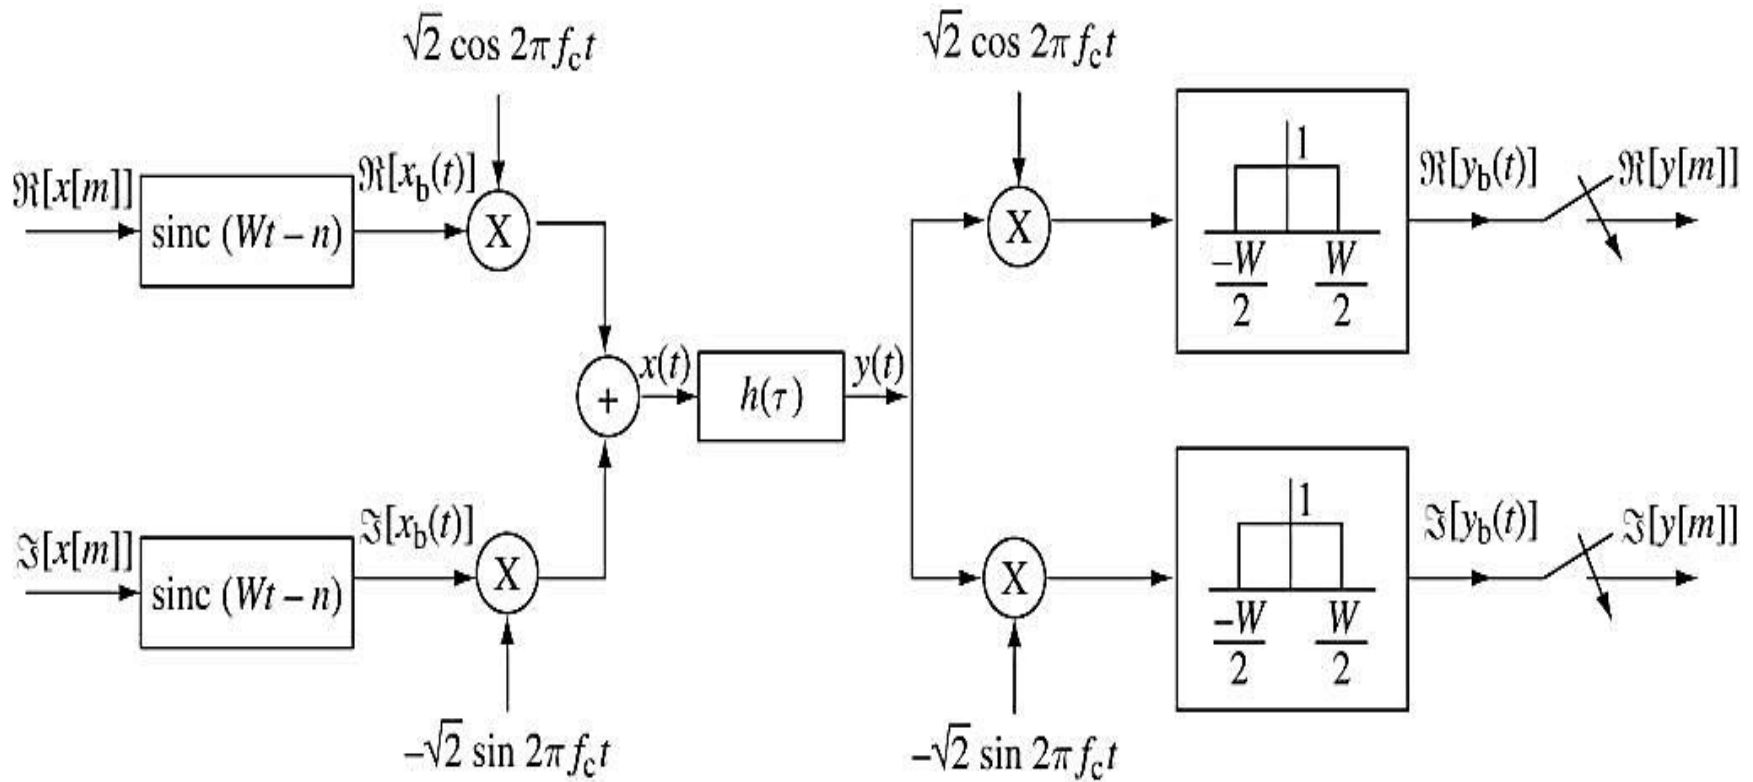

# Multipath Resolution

Sampled baseband-equivalent channel model:

$$y[m] = \sum_{\ell} h_{\ell} x[m - \ell]$$

where  $h_{\ell}$  is the  $\ell$  th complex channel tap.

$$h_{\ell} \approx \sum_i a_i e^{-j2\pi f_c \tau_i}$$


and the sum is over all paths that fall in the delay bin

$$\left[ \frac{\ell}{W} - \frac{1}{2W}, \frac{\ell}{W} + \frac{1}{2W} \right]$$

System resolves the multipaths up to delays of  $1/W$  .

# Sampling Interpretation

- $h_l$  is the  $l$ th sample of the low-pass version of the channel response  $h_b(\mathcal{C})$ .
- Contribution of the  $i$ th path is the projection of  $a_i^b \delta(\tau - \tau_i)$  onto  $\text{sinc}(W\tau - l)$ .

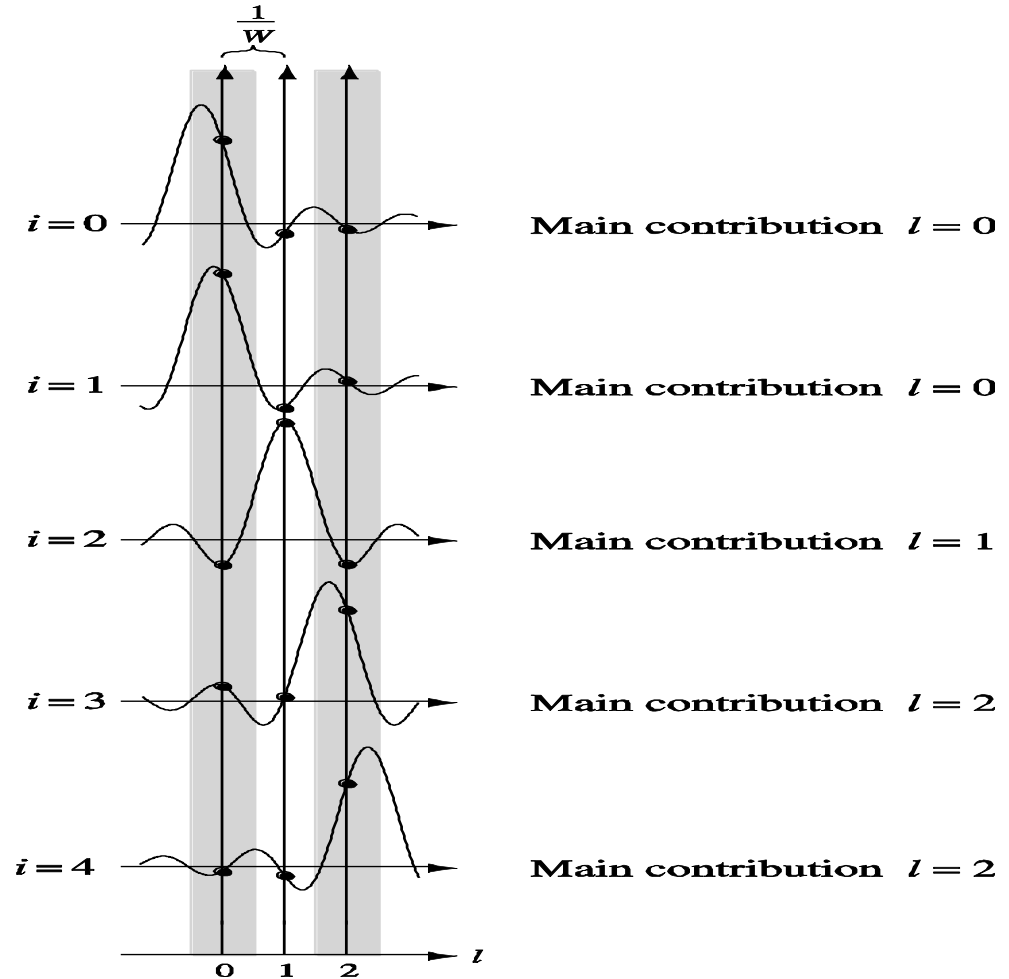

# Flat and Frequency-Selective Fading

- Fading occurs when there is destructive interference of the multipaths that contribute to a tap.

$$h_\ell \approx \sum_i a_i e^{-j2\pi f_c \tau_i}$$





**Delay spread**  $T_d := \max_{i,j} |\tau_i(t) - \tau_j(t)|$

**Coherence bandwidth**  $W_c := \frac{1}{T_d}$

$T_d \ll \frac{1}{W}, W_c \gg W \Rightarrow$  single tap, flat fading

$T_d > \frac{1}{W}, W_c < W \Rightarrow$  multiple taps, frequency selective



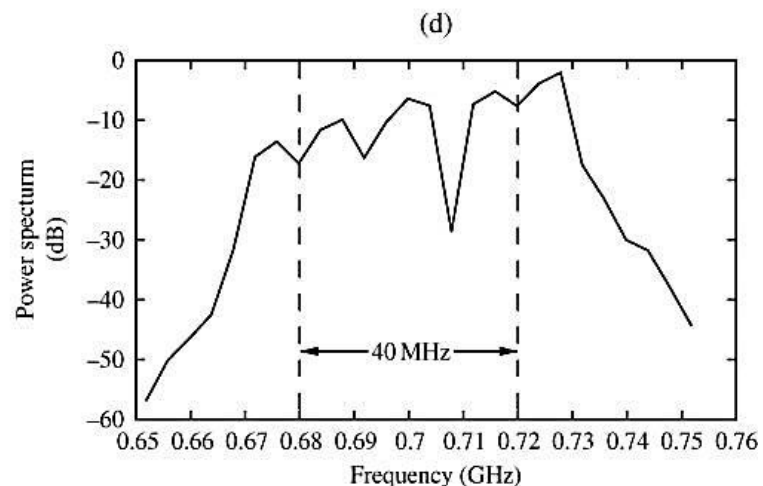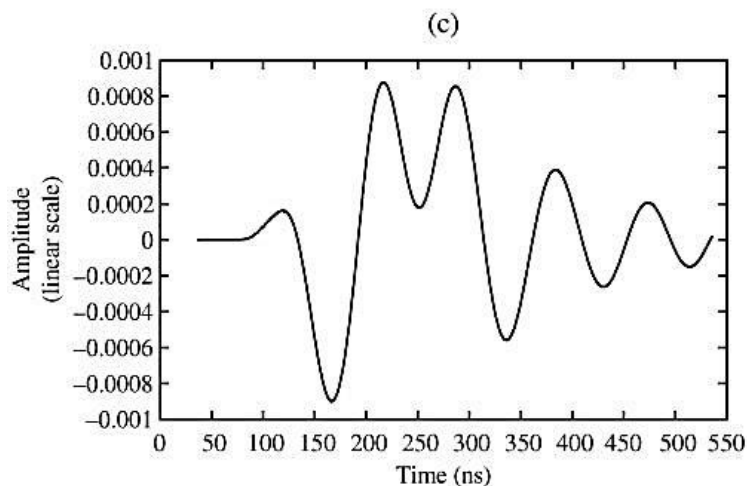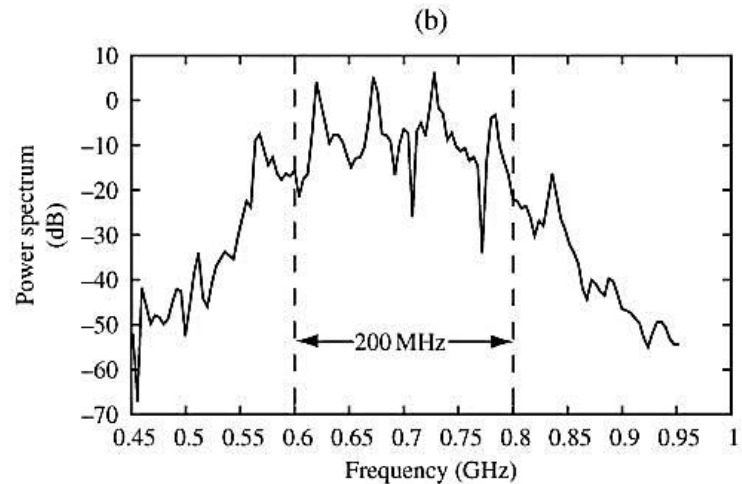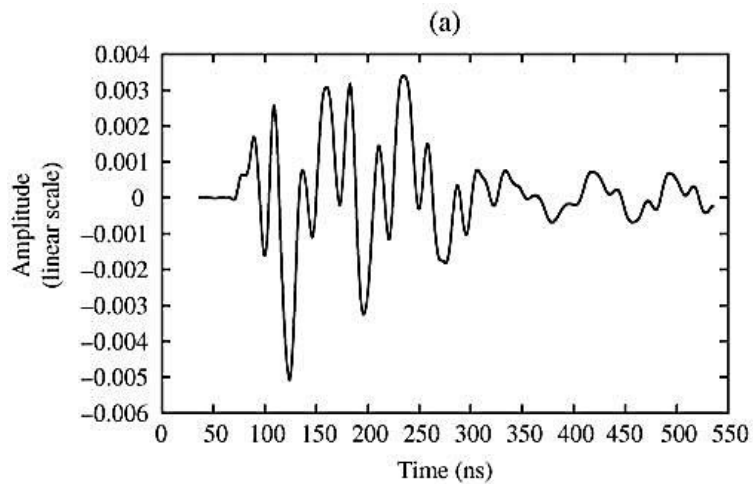

Effective channel depends on both physical environment and bandwidth!

# Time Variations

$$y[m] = \sum_{\ell} h_{\ell}[m]x[m - \ell]$$

$$h_{\ell}[m] \approx \sum_i a_i(t) e^{-j2\pi f_c \tau_i(t)}, \quad t = \frac{m}{W}$$

$f_c \tau'_i(t)$  = Doppler shift of the  $i$  th path

Doppler spread  $D_s := \max_{i,j} |f_c \tau'_i(t) - f_c \tau'_j(t)|$

Coherence time  $T_c := \frac{1}{D_s}$


# Two-path Example

$v = 60 \text{ km/hr}$ ,  $f_c = 900 \text{ MHz}$ :

direct path has Doppler shift of  $-50 \text{ Hz}$

reflected path has shift of  $+50 \text{ Hz}$

Doppler spread =  $100 \text{ Hz}$

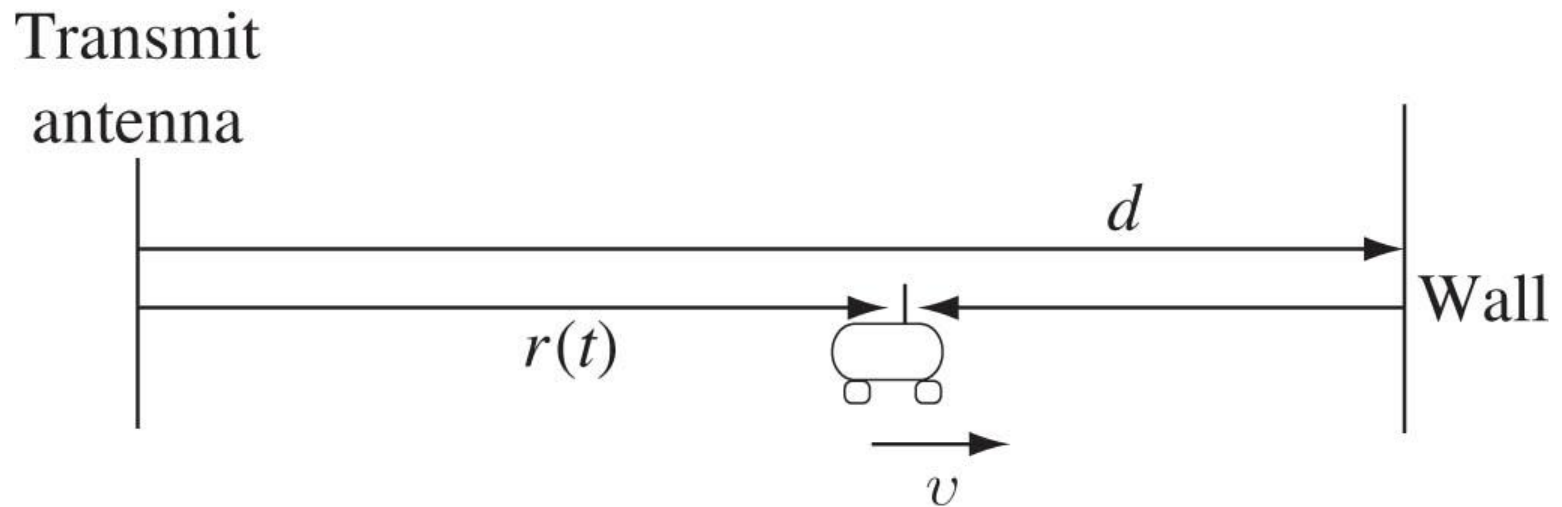

# Doppler Spread

$$D_s := \max_{i,j} |f_c \tau'_i(t) - f_c \tau'_j(t)|$$

Doppler spread is proportional to:

- the carrier frequency  $f_c$ ;
- the angular spread of arriving paths.

$$\tau'_i(t) = \frac{v}{c} \cos \theta_i$$

where  $\theta_i$  is the angle the direction of motion makes with the  $i$  th path.

Key channel parameters and time-scales	Symbol	Representative values
Carrier frequency	$f_c$	1 GHz
Communication bandwidth	$W$	1 MHz
Distance between transmitter and receiver	$d$	1 km
Velocity of mobile	$v$	64 km/h
Doppler shift for a path	$D = f_c v/c$	50 Hz
Doppler spread of paths corresponding to a tap	$D_s$	100 Hz
Time-scale for change of path amplitude	$d/v$	1 minute
Time-scale for change of path phase	$1/(4D)$	5 ms
Time-scale for a path to move over a tap	$c/(vW)$	20 s
Coherence time	$T_c = 1/(4D_s)$	2.5 ms
Delay spread	$T_d$	1 $\mu$ s
Coherence bandwidth	$W_c = 1/(2T_d)$	500 kHz

# Types of Channels

---

Types of channel	Defining characteristic
Fast fading	$T_c \ll$ delay requirement
Slow fading	$T_c \gg$ delay requirement
Flat fading	$W \ll W_c$
Frequency-selective fading	$W \gg W_c$
Underspread	$T_d \ll T_c$

---

# Typical Channels are Underspread

- Coherence time  $T_c$  depends on carrier frequency and vehicular speed, of the order of milliseconds or more.
- Delay spread  $T_d$  depends on distance to scatterers, of the order of nanoseconds (indoor) to microseconds (outdoor).
- Channel can be considered as time-invariant over a long time scale.